


- Designed for holding and transporting most liquids. Combine with Delta Chests or Crossovers to create flexible storage capacity.
- Heavy-Duty, Reinforced Steel Construction for long term durability. Four shapes for convenience.
- Full Center Baffles for extra strength. 2" NPT Reinforced bungs and Tie-Down Bar for stability.
- Lockable Cap and Coupler allow outside venting.
- Optional Prevent Fuel Cap Kit Available.
- 14 Gauge Reinforced Steel Construction.
- Filter System recommended.
- Pressure Tested for safety.




"FREE"  
Vented Cap with  
Purchase of Tank




#486000



#481000



#484000

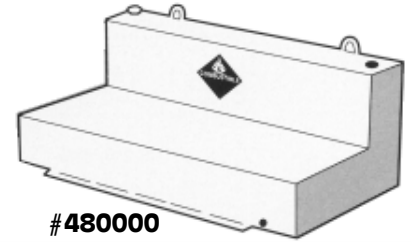


#480000

**CAUTION:** Tanks meet D.O.T. requirements for Combustible Fuels only. Tanks are not designed for and do not meet D.O.T. requirements for Flammable Fuels. Gasoline is a **FLAMMABLE FUEL**.

**WARNING:** These Tanks cannot be connected to an existing fuel system under any circumstances. Tanks are regulated by State Law. Contact the local Fire Chief or State Fire Marshal for local codes.

CAPACITY GALLONS	SHAPE	DIMENSIONS				ITEM #	PRICE
		A	B	C	D		
36	Vertical	59-5/8"	19"	9"	----	486000	\$622.84
*** 78	L-Shape	48"	25"	31"	6-1/2"	488000	683.12
100	Rectangle	45-1/4"	24"	23-1/4"	----	484000	744.74
105	L-Shape	59-5/8"	25"	31"	9"	480000	861.27

\*\*\* 488000 Also fits new Fullsize Short Wheel Base Trucks.

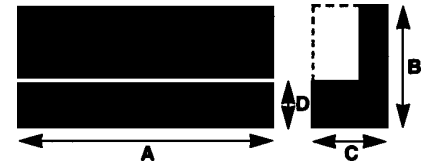

DC Rotary Vane Pump Series 1200 12 Volt  
This industry standard DC pump dispenses up to 15 GPM and has a draw that's easy on the DC power source.

- Explosion-proof UL listed 1/4 HP motor with permanent magnet and ball bearings.
- Heavy-duty three-wire battery cable.
- Built-in check valve and strainer.
- 12' hose with static ground wire.
- Carbon rotor vanes.
- No foot valve required.
- 2" base for tank openings.
- Pump may be padlocked.
- Heavy-duty switch, thermal overload
- Telescoping steel suction pipe from 22" to 40".
- Automatic bypass valve protection and junction box.
- Manual nozzle with nozzle boot that protects against dirt and contamination.



**FILL-RITE**

**FR-1210C**  
\$369.00  
WITH TANK  
\$389.00  
W/O TANK

Gas Cans & Water Cans



SIZE	STYLE	COLOR	TYPE	MODEL	PRICE
5 Gal	Metal	Red	Gas	5800-L	\$53.39
2 Gal	Plastic	Red	Gas	2300-L	12.93
5 Gal	Plastic	Red	Gas	5600-L	19.36
6 Gal	Plastic	Blue	Water	50863-L	15.44


**ACCESSORIES (for #31710 metal can)**

Cloth Strap	11460-L	3.00
-------------	---------	------

**Inline Filters**

**Combo**

Adaptor & Filter  
**CIM-COMBO**  
\$37.50



Filter  
**CIM-300-30**  
\$12.50

Adaptor  
**CIM-200H34**  
\$26.00

**Nozzles**

Manual Nozzle  
**NO-75UMN11**  
\$38.00



Auto Off Nozzle  
**NO-75DAU10**  
\$131.62



**Buna-N  
Hose**

3/4" x 12'  
**FRH-07512**  
\$60.00

3/4" x 20'  
**FRH-07520**  
\$86.00

**Vented  
Cap**



**FRTCB**  
\$53.40

Flow Meter Series 800  
Fill-Rite exclusive unicast component mounting configuration assures consistency, particularly in gravity flow applications. The easily reset register indicates use up to 99.9 gallons.

- Large, easy to read numbers
- Flexible installation flow ports position vertically or horizontally

**FR-807C**  
\$258.85

