

ROTARY HAND PUMP

- Fits 15 to 55 gallon drum with 2" bung openings
- Rotary vane type pump for dispensing gasoline, diesel fuel, kerosene, machine oil, lube oil, transmission fluid, hydraulic fluid and similar light petroleum products
- Strong die-cast aluminum alloy and bung adapter
- 4' PVC discharge hose
- One-piece steel inlet drum tube
- Not to be used with solvents, acids, alkalis, water or other corrosive liquids




Type Pump: Rotary Vane
 Inlet Size (NPT/in): 1
 Delivery Volume (GPM): 7-10
 Delivery Hose (ID/in): 3/4
 Inlet Pipe Length (in): 39-1/4
 Overall Length (in): 51-1/2
 Net Weight (lbs): 9

SD-62
\$102.38

DIAPHRAGM HAND PUMP

- Fits 15 to 55 gallon drum with 2" bung openings
- Piston can be reversed to change flow direction of pump
- 8' gasoline resistant discharge hose with straight type nozzle
- Two-piece inlet pipe with joint adapter
- Hardened steel lockable handle
- Strong die-cast aluminum alloy body, bung adapter and discharge nozzle
- Self-lubricating seal
- For use in dispensing gasoline, diesel, fuel, oil, alcohol and lubricants
- Not to be used with solvents, acids, alkalis, water or other corrosive liquids

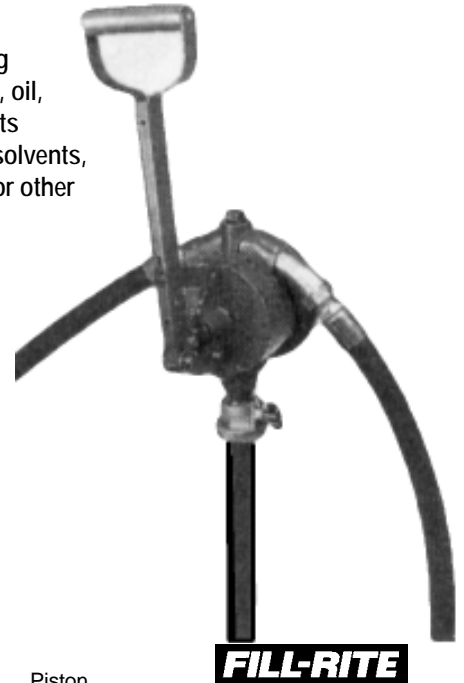

Type Pump: Piston
 Inlet Size (NPT/in): 1
 Outlet Size (NPT/in): 3/4
 Delivery Volume (1 gal): 8 strokes
 Delivery Hose (ID/in): 3/4
 Nozzle Type: Straight
 Inlet Pipe Length (in): 39-1/4
 Overall Length (in): 58-1/2
 Net Weight (lbs): 14

FR-152
\$233.80

PEDESTAL STAND

- For 6", 8" & 10" bench grinders
- Coolant tank
- Tool tray



Mounting Surface
 (Depth x Width (in): 9-3/4" x 9-3/4"
 Overall Height (in): 34

8071-0034
\$88.30

MANUAL BALL BEARING TROLLEY

- Can be installed or removed at any point along the track
- Adjustable to fit various sizes of flange and I-beams
- MBT series feature double sealed ball bearings
- Can be used with H and I-Beams
- Use on straight or curved track
- Built-in bumper guard



Rated Capacity: 3 Ton
 Beam Flange Width: 4" to 6"

252030
\$427.06

